

LUNA

ES

Montaje: Adosable.
Fuente de luz: Módulos lineales LED SMD.
 Temperatura de color 4000K (estándar).
 Disponible, 3000K.
Sistema óptico: Reflector.
Distribución luminosa: Simétrica.
Equipo eléctrico: Equipo de control electrónico. PF>0,95.
 Disponible, regulable DALI y/o kit de emergencia (1-3 h).
Materiales: Cuerpo: Policarbonato color blanco. Cierres: Policarbonato.
 Difusor: Policarbonato opal autoextinguible estabilizado a los rayos uva.
Acabado: Color blanco RAL 9003.




EN

Mounting: Surface.
Light source: LED linear modules SMD.
 Temperature color 4000K (standard).
 Available, 3000K.
Optical system: Reflector.
Light distribution: Symmetrical.
Electrical equipment: Electronic control gear. PF>0,95.
 Available, dimmable DALI and/or emergency kit (1-3 h).
Materials: Body: Polycarbonate in white color. Cover: Polycarbonate.
 Diffuser: Self extinguishing opal polycarbonate UV stabilized.
Surface finish: White color RAL 9003.





LUNA-430-IP65-25W

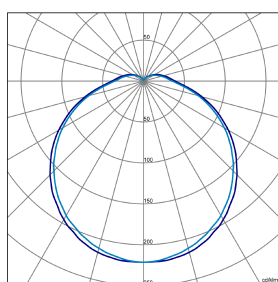

FLICKER FREE

IP 65

188 lm/w

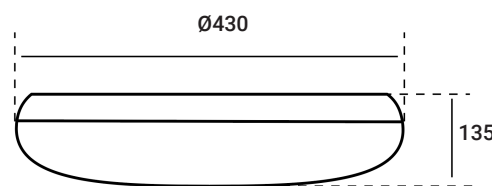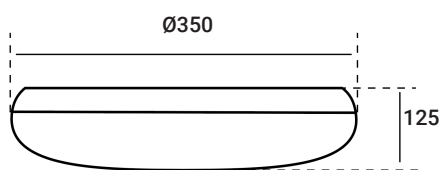

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS
 220-240V / 50-60Hz
 IP 65
 IK 08
 CLASE II / CLASS II
 50.000h / L80B10
 -20° / +35°
 CRI 80

DISPONIBLE/AVAILABLE

DALI
 3000K
 EMERGENCY
 1h / 3h

CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
LNA122K0B	LUNA-350 IP65 16W 2800Lm/840	1,5	16W	2800	175 lm/W	4000
LNA224K0B	LUNA-430 IP65 25W 4700Lm/840	2,1	25W	4700	188 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 3000K, 6000K DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)