

ASYM/PTE

ES

Montaje: Empotrado.

Fuente de luz: Módulos lineales LED SMD.
Temperatura de color 4000K.
Disponible, 3000K, 6000K.

Sistema óptico: Reflector asimétrico mate.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico TRIDONIC. PF>0,95. Disponible, equipo de control electrónico regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Acero de alta resistencia a la torsión y espesores mínimos garantizados de 0,6mm, según Normas ENEC-10 y VDE. Reflector: Aluminio anodizado mate.

Acabado: Color blanco RAL 9003.



EN

Mounting: Recessed.

Light source: LED linear modules SMD.
Temperature color 4000K.
Available, 3000K, 6000K.



Optical system: Matt asymmetric reflector.

Light distribution: Direct.


Electrical equipment: Electronic control gear TRIDONIC. PF>0,95. Available, dimmable 1-10V or DALI and/or emergency kit (1-3 h).

Materials: Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Reflector: Matt anodized aluminum.


Surface finish: White color RAL 9003.

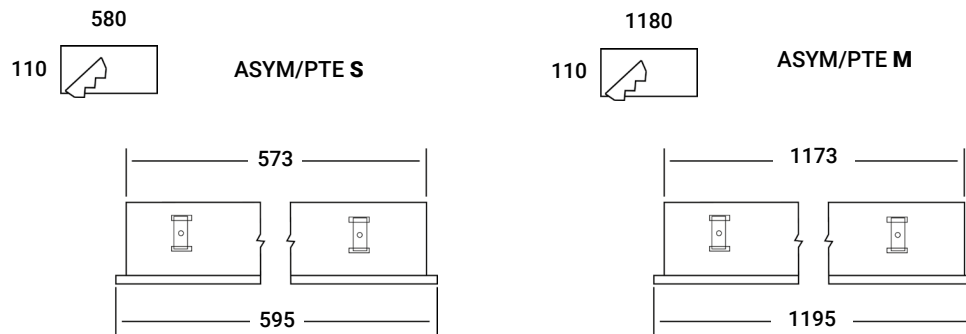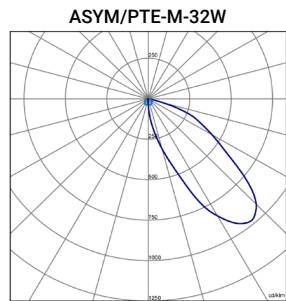

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE ONLINE CONFIGURATION



| Código Code | Referencia Reference | Kg | Potencia Power | Lúmenes Lumens | Eficiencia Efficiency | CCT (K) |
|----------------|---------------------------|-----|-------------------|-------------------|--------------------------|---------|
| ASE112K2B | ASYM/PTE-S-16W-2540lm/840 | 2,0 | 16W | 2540 | 159 lm/W | 4000 |
| ASE213K6B | ASYM/PTE-M-32W-5080lm/840 | 3,5 | 32W | 5080 | 159 lm/W | 4000 |

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 3000K, 6000K

REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP)

DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)

