




IP65 WATERPROOF FITTINGS • LED

PRISMATIC DIFFUSER

LOW TEMPERATURES -40°C







WATERPROOF FITTINGS LED
EST/PRISMAPC/-40°C



EST/PRISMAPC/-40°C

- NO CLIPS DIFFUSER
- HIGH RELEASE, lm/W>130
- VERY REDUCED HEIGHT
- QUICK CONNECTION

Mounting	Surface.	
Light source	LED linear modules SMD  TRIDONIC.	
Optical system	Diffuser resistant to UVA rays (no clips system), reflector. Colour temperature 4000K, standard. (Option 3000K, 5000K, 6000K).	
Light distribution	Direct.	
Wiring	Electronic control gear (EEI=A++) Tridonic. PF>0,95	
Material	Body: Polycarbonate. Reflector: Aluminum.	
	Diffuser: Unbreakable longitudinal prismatic polycarbonate. Ceiling fixing: Stainless steel clamp	
Surface finish	Body: Grey color with efficient gasket wich is injected into the body.	
Accessories	Suspension set 2 units. IP-68 fast connector (not included).	
Benefits	Ultra compact waterproof fitting. LED luminaire with integrated electronic control gear. Optimal lighting curve, homogeneous lighting in all area of projection. Low power consumption and high efficiency. Average service life > 50.000 hours. Maintenance-optimised design. Careful with the environment, it does not contain mercury. Fast electrical connection without opening the luminaire.	

11500 lm
164 lm/W
>80 Ra

NO CLIPS DIFFUSER



LED MODULES



ALLOWS TO ALING THE LUMINAIRES ONCE INSTALLED



IP65 WATERPROOF FITTINGS • LED PRISMATIC DIFFUSER LOW TEMPERATURES -40°C



WATERPROOF FITTING LED
EST/PRISMAPC/-40°C

IP-68 FAST CONNECTOR | UNDER REQUEST


IP-68 FAST CONNECTOR
04010201 FAST CONNECTOR EST/ONIX



FAST ELECTRICAL CONNECTION





CONNECTION OF FEW LUMINAIRES BETWEEN EACH OTHER
1563610L002 INC.ELEC LC EST/ONIX

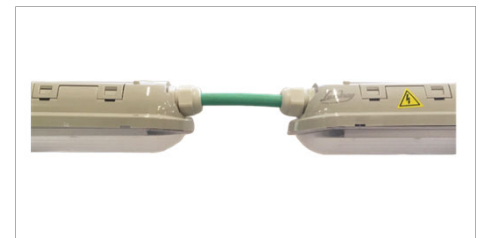

Fast electrical connection without opening the luminaire.

Easy connection of few luminaires between each other.

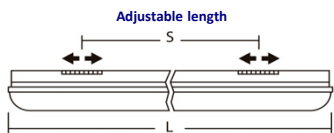

	X	Y	L	S
EST/PRISMAPC-1180	72	61	1180	570-670
EST/PRISMAPC-1480	72	61	1480	850-950



CODE	REFERENCE	Kg.	Light output lm	Power W	Efficiency LED module + Driver lm/W	Colour temperature and rendering index		Replace to lamp
						CCT (K)	CRI (Ra)	
EPN324K8G	LED EST/PRISMAPC-1180/-40°C-32W. 4800lm/840 TR EU	(1,8)	4800	32	150	4000	>80	2x36W.
EPN327K2G	LED EST/PRISMAPC-1180/-40°C-48W. 7200lm/840 TR EU	(1,8)	7200	48	150	4000	>80	>2x36W.
EPN328K0G	LED EST/PRISMAPC-1180/-40°C-56W. 8000lm/840 TR EU	(1,8)	8000	56	143	4000	>80	>2x36W.
EPN426K0G	LED EST/PRISMAPC-1480/-40°C-40W. 6000lm/840 TR EU	(1,8)	6000	40	150	4000	>80	2x58W.
EPN429K0G	LED EST/PRISMAPC-1480/-40°C-60W. 9000lm/840 TR EU	(1,8)	9000	60	150	4000	>80	>2x58W.
EPN4211KG	LED EST/PRISMAPC-1480/-40°C-70W. 11500lm/840 TR EU	(1,8)	11500	70	164	4000	>80	2x80W.

1563610L002 INC.ELEC LC EST/ONIX

04010201 FAST CONNECTOR EST/ONIX

Other powers under request. Note: Standard 4000K. Possibility mounting 3000K, 5000K and 6000K.