

# BARLIGHT

## ES

**Montaje:** Empotrable.  
**Fuente de luz:** Módulos lineales LED SMD.  
 Temperatura de color seleccionable, CCT: 3000K, 4000K, 6000K.  
**Sistema óptico:** Difusor opal.  
**Distribución luminosa:** Directa.  
**Equipo eléctrico:** Equipo de control electrónico. PF>0,95.  
 Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h) (equipo en remoto).  
**Materiales:** Cuerpo: Aluminio extruido lacado en blanco.  
 Difusor: Material termoplástico opalino de fácil limpieza.  
**Acabado:** Aluminio lacado en blanco.




## EN


**Mounting:** Recessed.  
**Light source:** LED linear modules SMD  
 Selectable temperature color, CCT: 3000K, 4000K, 6000K.  
**Optical system:** Opal diffuser.  
**Light distribution:** Direct.  
**Electrical equipment:** Electronic control gear. PF>0,95.  
 Available, dimmable 1-10V or DALI and/or emergency kit (1-3 h) (remote equipment).  
**Materials:** Body: Aluminum extruded lacquered in white.  
 Diffuser: Opal thermoplastic material easy to clean.  
**Surface finish:** White colour extruded aluminum.



BARLIGHT-45W



MONTAJE EMPOTRADO/RECESSED MOUNTING  
 BAJO CONSULTA SET DE SUSPENSION/  
 UNDER REQUEST SUSPENSION SET

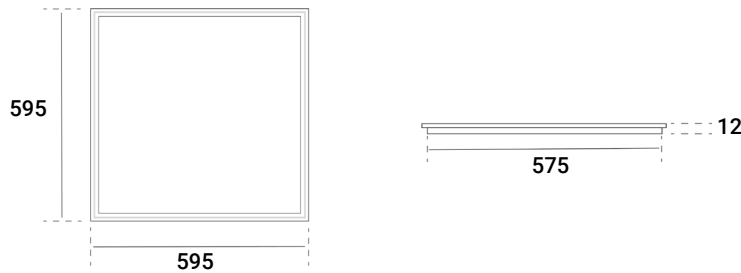

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS  
 220-240V / 50-60Hz  
 IP 44  
 IK 02  
 CLASE II / CLASS II  
 50.000h / L80B10  
 -20° / +40°  
 CRI 80  
 3000K / 4000K / 6000K

DISPONIBLE/AVAILABLE

1-10V / DALI  
 EMERGENCY  
 1h / 3h

CONFIGURACION ONLINE  
 ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT(K) CCT(K)
BAR223C2B	BARLIGHT-32W 3200lm/830-840-860 TR EU	0,5	32W	3200	100 lm/W	3000, 4000, 6000
BAR223CLB	BARLIGHT-38W 3800lm/830-840-860 LM	0,5	38W	3800	100 lm/W	3000, 4000, 6000
BAR223C8B	BARLIGHT-38W 3800lm/830-840-860 PH/TR	0,5	38W	3800	100 lm/W	3000, 4000, 6000
BAR223CEB	BARLIGHT-38W 3800lm/830-840-860 TR EU	0,5	38W	3800	100 lm/W	3000, 4000, 6000
BAR224C5B	BARLIGHT-45W 4500lm/830-840-860 TR EU	0,5	45W	4500	100 lm/W	3000, 4000, 6000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI      KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h  
 REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/ AMBIENT LIGHT + PRESENCE SENSOR (RLP)      DETECTOR DE PRESENCIA (SLP)/ PRESENCE DETECTOR (SLP)

BAJO CONSULTA/UNDER REQUEST      SET DE SUSPENSION/SUSPENSION SET