

## P/OPALPC IP65

### ES

**Montaje:** Empotrado.

**Fuente de luz:** Módulos lineales LED SMD TRIDONIC.  
Temperatura de color 4000K.  
Disponible, 3000K, 5000K, 6000K.

**Sistema óptico:** Difusor opal.

**Distribución luminosa:** Directa.

**Equipo eléctrico:** Equipo de control electrónico TRIDONIC. PF>0,95.  
Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

**Materiales:** Cuerpo: Acero galvanizado lacado en blanco con tratamiento anti-corrosivo según normas ENEC-10 y VDE. Difusor: Opal.

**Acabado:** Color blanco RAL 9003.



### EN

**Mounting:** Recessed.

**Light source:** LED linear modules SMD TRIDONIC.  
Temperature color 4000K.  
Available, 3000K, 5000K, 6000K.

**Optical system:** Opal diffuser.

**Light distribution:** Direct.


**Electrical equipment:** TRIDONIC electronic control gear. PF> 0,95.  
Available, dimmable 1-10V or DALI and/or emergency kit (1-3 h).

**Materials:** Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Diffuser: Opal.

**Surface finish:** White color RAL 9003.



P/OPALP-IP65-55W



CONECTOR IP67








IP65



ACCESORIO PARA EMPOTRAR  
ACCESSORY FOR RECESS



CIERRE ESTANCO CON LUMINARIA Y TECHO  
SEAL CLOSURE WITH LUMINAIRE AND CELING

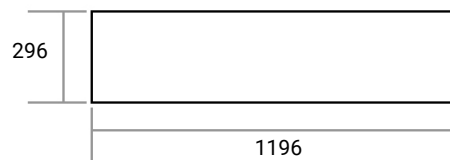

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS  
 220-240V / 50-60Hz  
 IP 65  
 IK 02  
 CLASE I / CLASS I  
 50.000h / L80B10  
 -20° / +40°  
 CRI 80

DISPONIBLE/AVAILABLE

1-10V DALI  
 3000K, 5000K, 6000K  
 EMERGENCY  
 1h / 3h

CONFIGURACION ONLINE  
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
154234K9B	P/OPALPC-IP65-32W 4900Lm/840 (596x596)	7,2	32W	4900	153 lm/W	4000
154334K9B	P/OPALPC-IP65-42W 5800Lm/840 (596x596)	7,2	42W	5800	138 lm/W	4000
154235K8B	P/OPALPC-IP65-55W 7600Lm/840 (596x596)	7,2	55W	7600	138 lm/W	4000
154335K8B	P/OPALPC-IP65-32W 4900Lm/840 (1196x296)	7,2	32W	4900	153 lm/W	4000
154237K6B	P/OPALPC-IP65-42W 5800Lm/840 (1196x296)	7,2	42W	5800	138 lm/W	4000
154337K6B	P/OPALPC-IP65-55W 7600Lm/840 (1196x296)	7,2	55W	7600	138 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI    KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h    T.COLOR 3000K, 5000K, 6000K    ACCESORIO PARA EMPOTRAR/ACCESSORY FOR RECESS  
 REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP)    DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)