

HOS-DIR/ASY

ES

Montaje: Empotrable.

Fuente de luz: Módulos lineales LED SMD TRIDONIC.
Temperatura de color 4000K.
Disponible, 3000K, 5000K, 6000K.

Sistema óptico: Difusor principal: opal. Difusores secundarios: asimétrico y/o reflector aluminio parabólico brillante.

Distribución luminosa: Iluminación principal: directa.
Secundaria: asimétrica y/o directa (lamas).

Equipo eléctrico: Equipo de control electrónico. PF>0,95.
Bajo consulta, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Acero de alta resistencia a la torsión y espesores mínimos garantizados de 0,6mm, según Normas ENEC-10 y VDE.
Difusor principal: Metacrilato. Difusor secundario: Policarbonato.

Acabado: Color blanco RAL 9016.



EN

Mounting: Recessed.

Light source: TRIDONIC SMD LED linear modules.
Temperature color 4000K.
Available, 3000K, 5000K, 6000K.

Optical system: Principal diffuser: opal. Secondary diffusers: asymmetric and/or bright parabolic aluminum reflector.

Light distribution: Principal lighting: Direct. Secondary: asymmetric and/or direct (louvre).


Electrical equipment: Electronic control gear. PF>0,95. Under request, dimmable 1-10V or DALI and/or emergency kit (1-3 h).

Materials: Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards. Principal diffuser: Methacrylate. Secondary diffuser: Polycarbonate.

Surface finish: White color RAL 9003.




DIFUSOR PRINCIPAL/PRINCIPAL DIFFUSER OPAL

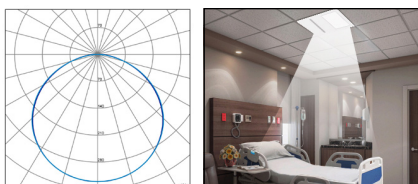

DIFUSORES SECUNDARIOS/SECONDARY DIFFUSERS

INDIRECT

LAMAS/LOUVRE

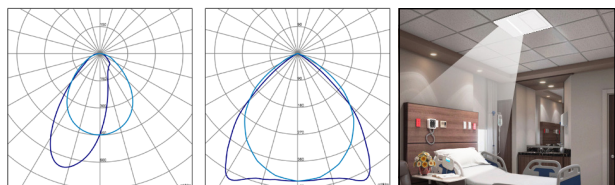

FLICKER
FREE



HOS-DIR/ASY-32W+16W




PRINCIPAL
Difusor opal/Opal diffuser

SECUNDARIO/SECONDARY
Difusor asimétrico/Asymmetric diffuser

SECUNDARIO/SECONDARY
Difusor de lamas/Louvre diffuser


HOS-DIR/ASY-32W+16W+16W

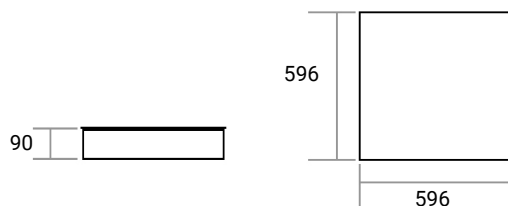


DISPONIBLE MODELO ADOSABLE/AVAILABLE SURFACE MODEL

Código Code	Referencia Reference
HDS227K6B HOS-DIR/ASY/S-32W+16W	7620lm/840
HDS2211KB HOS-DIR/ASY/S-32W+16W+16W	10160lm/840

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes/Lumens		CCT (K) CCT (K)
				Principal	Secundario/Secondary	
HDA227K6B	HOS-DIR/ASY-32W+16W 7620lm/840	3,6	32W+16W	5080	2540	4000
HDA2211KB	HOS-DIR/ASY-32W+16W+16W 10160lm/840	3,6	32W+16W+16W	5080	2540 + 2540	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 3000K, 5000K, 6000K ACCESORIO PARA EMPOTRAR/ACCESSORY FOR RECESS
REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP) DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)