

## CENSER/S 100

### ES

Montaje: Adosable.

Fuente de luz: Módulos compactos LED COB TRIDONIC  
Temperatura de color 4000K. Disponible, 3000K.

Sistema óptico: Reflector.

Distribución luminosa: Directa. Estándar 24°. Disponible 16°, 38°.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.  
Disponible. regulable DALI.

Materiales: Cuerpo: Aluminio extruido lacado en blanco. Reflector: Aluminio anodizado brillante. Cierre: Cristal transparente.

Acabado: Color blanco RAL 9003 (estándar). Disponible, gris RAL 9006, negro RAL 9005 (mismo precio).



### EN

Mounting: Surface.

Light source: LED compact modules COB TRIDONIC.  
Temperature color 4000K. Available, 3000K.

Optical system: Reflector.

Light distribution: Direct. Standard 24°. Available 16°, 38°.

Electrical equipment: Electronic control gear. PF>0,95.  
Available, dimmable DALI.


Materials: Body: Aluminum extruded lacquered in white. Reflector: Bright anodized aluminum.

Surface finish: White color RAL 9003 (standard). Available, grey RAL 9006, black RAL 9005 (same price).




ESTANDAR | STANDARD


CENSER-100-24°-14W




CENSER-100-16°-14W




CENSER-100-38°-14W



ESTANDAR COLOR BLANCO  
STANDARD WHITE COLOR

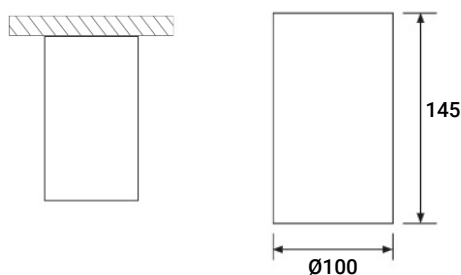

ESTANDAR/STANDARD



CONFIGURACION ONLINE  
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
CES112K2B	CENSER/S-100-24°-14W 2215lm/840	1,0	14W	2215	158 lm/W	4000
CES113K1B	CENSER/S-100-24°-20W 3160lm/840	1,0	24W	3160	158 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING DALI    T.COLOR 3000K    OPTICA/LENS 16°, 38°