

## WOOD-T

### ES

Montaje: Suspendido.

Fuente de luz: Módulos lineales LED SMD TRIDONIC.  
Temperatura de color 4000K. Disponible, 3000K.

Sistema óptico: Difusor.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.  
Disponible, regulable DALI.

Materiales: Cuerpo: Aluminio de extrusión de alta calidad lacado al horno, forrado con madera tratada en diferentes acabados.

Difusor: Opal.

Acabado: Haya. Disponible, roble y sapele.



### EN

Mounting: Suspended.

Light source: LED linear modules SMD TRIDONIC.  
Temperature color 4000K. Available, 3000K.


Optical system: Diffuser.

Light distribution: Direct.


Electrical equipment: Electronic control gear. PF>0,95.  
Available, dimmable DALI.

Materials: Body: High-quality extruded aluminum, baked lacquered, lined with treated wood in different finishes. Diffuser: Opal.

Surface finish: Beech color. Available, Oak and sapele.



ROBLE/OAK




SAPELI/SAPELE




HAYA/BEECH




BAJO CONSULTA/UNDER REQUEST  
TUNABLE WHITE

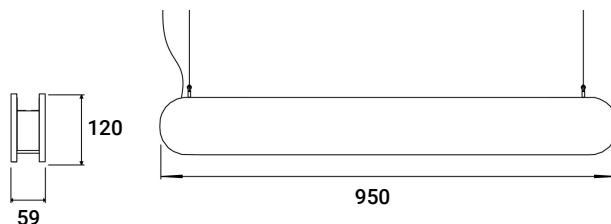

#### ESTANDAR/STANDARD



#### DISPONIBLE/AVAILABLE



#### CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
WT1312K2H	WOOD-T-950-19W 2200lm/840+SUS	4,5	19W	2200	116 lm/W	4000
WT1314K4H	WOOD-T-950-38W 4400lm/840+SUS	4,5	38W	4400	116 lm/W	4000

#### ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING DALI T.COLOR 3000K FLORON PORTAEQUIPOS DE MADERA/WOODEN EQUIPMENT HOLDER FLORON PORTAEQUIPOS METALICO/METAL EQUIPMENT HOLDER

BAJO CONSULTA/UNDER REQUEST TUNABLE WHITE

