

WOOD-M

ES

Montaje: Suspendido.
Fuente de luz: Módulos lineales LED SMD TRIDONIC.
 Temperatura de color 4000K. Disponible, 3000K.
Sistema óptico: Reflector de aluminio mate.
 Óptica estándar LEDIL 80°. Disponible, 50°
Distribución luminosa: Directa.
Equipo eléctrico: Equipo de control electrónico (no integrado).
 PF>0,95. Disponible, regulable DALI.
Materiales: Cuerpo: Madera tratada en diferentes acabados.
Acabado: Haya. Disponible, roble y sapele.



EN



Mounting: Suspended.
Light source: TRIDONIC SMD LED linear modules.
 Temperature color 4000K. Available, 3000K.
Optical system: Mate aluminum reflector.
 LEDIL standard lens 80°. Available, 50°.
Light distribution: Direct.
Electrical equipment: Electronic control gear (not integrated).
 Available, dimmable DALI.
Materials: Body: Treated wood in different finishes.
Surface finish: Beech color. Available, Oak and sapele.



ESTANDAR | STANDARD

WOOD-M-80°-21W


WOOD-M-50°-21W



ROBLE/OAK



SAPELI/SAPELE

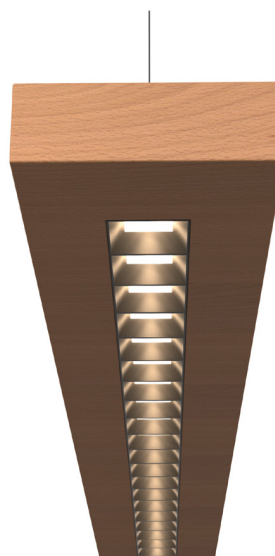


HAYA/BEECH



FLICKER FREE



<17

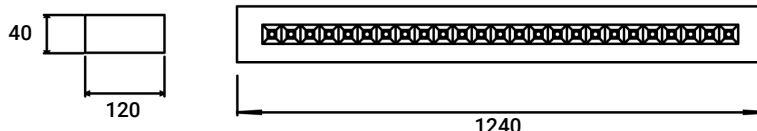

ESTANDAR/STANDARD

DISPONIBLE/AVAILABLE

CONFIGURACION ONLINE
ONLINE CONFIGURATION



5 AÑOS
5 YEARS



220-240V
50-60Hz



IP 40



IK 04



CLASE III
CLASS III



50.000h
L80B10



-20°
+45°



CRI 80



80°



DALI



3000K



50°



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
WM1322K4H	WOOD-M-80°-1240-15W 2400lm/840+SUS	1,8	15W	2400	160 lm/W	4000
WM1323K4H	WOOD-M-80°-1240-21W 3400lm/840+SUS	1,8	21W	3400	162 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMMING DALI T.COLOR 3000K OPTICA/LENS 50°

FLORON PORTAEQUIPOS DE MADERA/WOODEN EQUIPMENT HOLDER FLORON PORTAEQUIPOS METALICO/METAL EQUIPMENT HOLDER