

DMC-150

ES

Montaje: Empotrable.
Fuente de luz: Módulos compactos LED COB.
 Temperatura de color 4000K. Disponible, 3000K.
Sistema óptico: Ópticas de diferentes aperturas.
Distribución luminosa: Directa. Óptica estándar 75°. Disponibles 16°, 24°, 38°, 50°.
Equipo eléctrico: Equipo de control electrónico. PF>0,95. Disponible, regulable DALI y/o Kit de emergencia (1-3 h).
Materiales: Aro de aluminio, lacado al horno y acabados texturizados.
Acabado: Color blanco RAL 9003 (estándar). Opcional gris RAL 9006, negro RAL 9005.





EN

Mounting: Recessed.
Light source: LED compact modules COB.
 Temperature color 4000K. Available, 3000K.
Optical system: Lens with different apertures.
Light distribution: Direct. Standard lense 75°. Available 16°, 24°, 38°, 50°.
Electrical equipment: Electronic control gear. PF>0,95. Available, dimmable 1-10V or DALI, and/or emergency Kit (1-3 h).
Materials: Ring made of aluminium, baked lacquered and textured finishes.
Surface finish: White color RAL 9003 (standard). Optional grey RAL 9006, black RAL 9005.



ESTANDAR | STANDARD

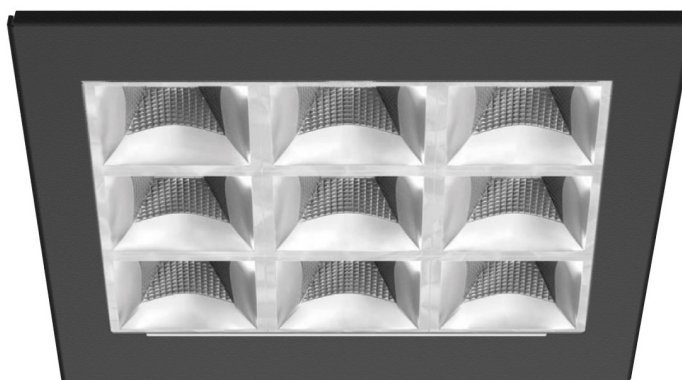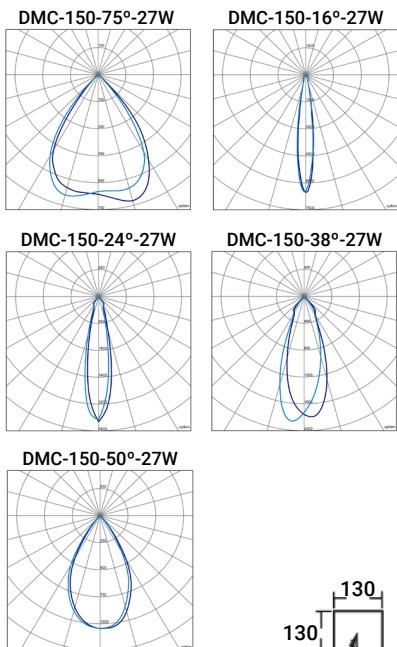


FLICKER FREE




<17

NEGRO/BLACK

ESTANDAR COLOR BLANCO
STANDARD WHITE COLOR

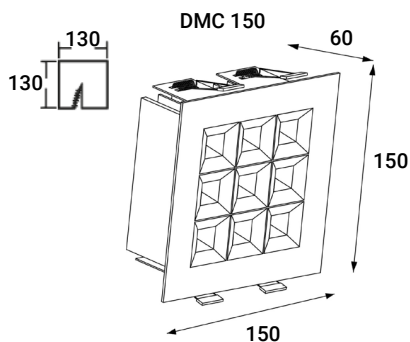


BLANCO/WHITE




GRIS/GREY

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
DMC211K9B	DMC-150-75°-15W 1900lm/840	0,9	15W	1900	127 lm/W	4000
DMC212K6B	DMC-150-75°-21W 2600lm/840	0,9	21W	2600	124 lm/W	4000
DMC213K4B	DMC-150-75°-27W 3400lm/840	0,9	27W	3400	126 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 3000K OPTICA/LENS 16°, 24°, 38°, 50°
 REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP) DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)