

P/MCR IP65

ES

Montaje: Empotrado.

Fuente de luz: Módulos lineales LED SMD TRIDONIC.

Temperatura de color 4000K.

Disponible, 3000K, 5000K, 6000K.

Sistema óptico: Difusor microprismático.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico TRIDONIC. PF>0,95.

Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Acero galvanizado lacado en blanco con tratamiento anti-corrosivo según normas ENEC-10 y VDE. Difusor: Microprismático.

Acabado: Color blanco RAL 9003.



EN

Mounting: Surface.

Light source: LED linear modules SMD TRIDONIC.

Temperature color 4000K.

Available, 3000K, 5000K, 6000K.

Optical system: Microprismatic diffuser.

Light distribution: Direct.

Electrical equipment: TRIDONIC electronic control gear. PF>0,95.

Available, dimmable 1-10V or DALI and/or emergency kit (1-3 h).


Materials: Body: High resistance steel with guaranteed minimum thickness of 0.6mm, according to ENEC-10 and VDE standards.

Diffuser: Microprismatic.

Surface finish: White color RAL 9003.




P/MCR-IP65-55W



CONECTOR IP67



SALAS BLANCAS
CLEAN ROOM









IP65



ACCESORIO PARA EMPOTRAR
ACCESSORY FOR RECESS

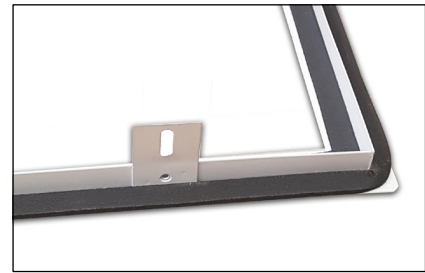

CIERRE ESTANCO CON LUMINARIA Y TECHO
SEAL CLOSURE WITH LUMINAIRE AND CELING

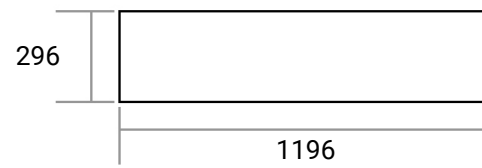

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS
 220-240V / 50-60Hz
 IP 65
 IK 02
 CLASE I / CLASS I
 50.000h / L80B10
 -20° / +40°
 CRI 80

DISPONIBLE/AVAILABLE

1-10V / DALI
 3000K / 5000K / 6000K
 EMERGENCY
 1h / 3h

CONFIGURACION ONLINE
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
154234K9B2	P/MCR-IP65-32W 4900Lm/840 (596x596)	7,2	32W	4900	153 lm/W	4000
154334K9B2	P/MCR-IP65-42W 5800Lm/840 (596x596)	7,2	42W	5800	138 lm/W	4000
154235K8B2	P/MCR-IP65-55W 7600Lm/840 (596x596)	7,2	55W	7600	138 lm/W	4000
154335K8B2	P/MCR-IP65-32W 4900Lm/840 (1196x296)	7,2	32W	4900	153 lm/W	4000
154237K6B2	P/MCR-IP65-42W 5800Lm/840 (1196x296)	7,2	42W	5800	138 lm/W	4000
154337K6B2	P/MCR-IP65-55W 7600Lm/840 (1196x296)	7,2	55W	7600	138 lm/W	4000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 3000K, 5000K, 6000K ACCESORIO PARA EMPOTRAR/ACCESSORY FOR RECESS
 REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/AMBIENT LIGHT + PRESENCE SENSOR (RLP) DETECTOR DE PRESENCIA (SLP)/PRESENCE DETECTOR (SLP)