

NT55/OPAL-MCR

ES

Montaje: Integrado en carril.

Fuente de luz: Módulos lineales LED SMD.
Temperatura de color 4000K.
Disponible, 2700K, 3000K, 5000K, 6000K.

Sistema óptico: NT55/OPAL: Difusor opal.
NT55/MCR: Difusor microprismático.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico TRIDONIC. PF>0,95.
Disponible, regulable 1-10V o DALI y/o kit de emergencia (1-3 h).

Materiales: Cuerpo: Perfil de aluminio extruido.
Difusor: Opal. Microprismático.

Acabado: Color blanco RAL 9003. Disponible, gris RAL 9006,
negro RAL 9005.



EN

Mounting: Integrated in track.

Light source: LED linear modules SMD.
Temperature color 4000K.
Available, 2700K, 3000K, 5000K, 6000K.

Optical system: NT55/OPAL: Opal diffuser.
NT55/MCR: Microprismatic diffuser.

Light distribution: Direct.




Electrical equipment: Electronic control gear TRIDONIC. PF>0,95.
Available, dimmable 1-10V or DALI and/or emergency Kit (1-3 h).

Materials: Body: Extruded aluminum profile.
Diffuser: Opal. Microprismatic.

Surface finish: White color RAL 9003. Available, grey RAL 9006,
black RAL 9005.



NT55/OPAL-1970-84W

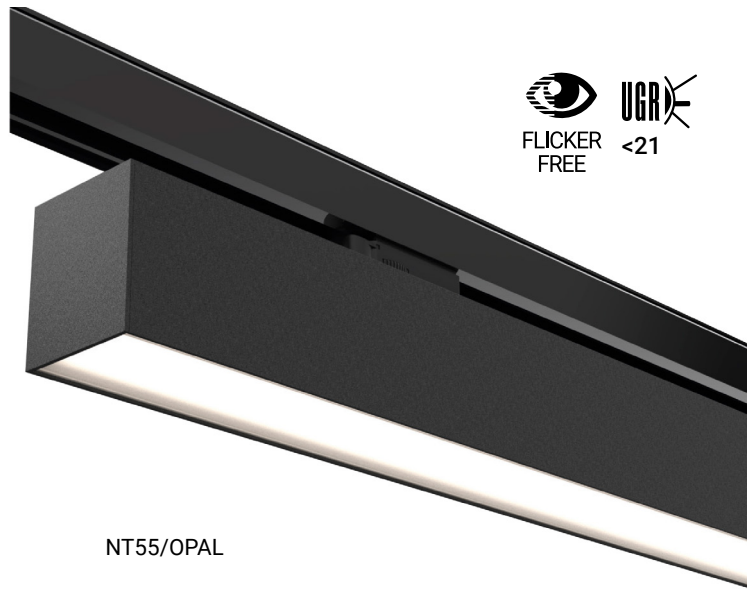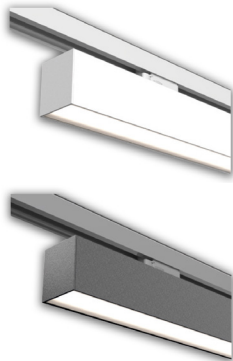



NT55/OPAL

ESTANDAR COLOR BLANCO
STANDARD WHITE COLOR

BAJO CONSULTA/UNDER REQUEST
TUNABLE WHITE


NT55/MCR-1970-84W

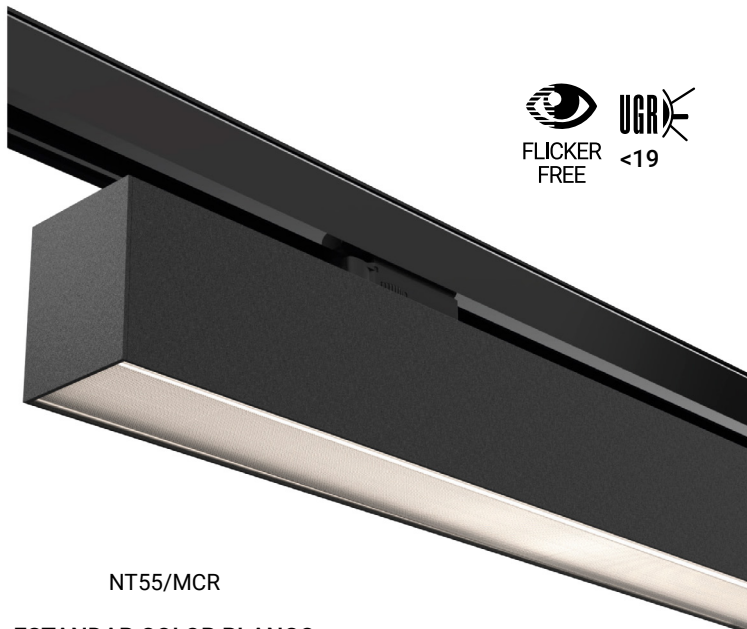

NT55/MCR

ESTANDAR COLOR BLANCO
STANDARD WHITE COLOR

BAJO CONSULTA/UNDER REQUEST
TUNABLE WHITE

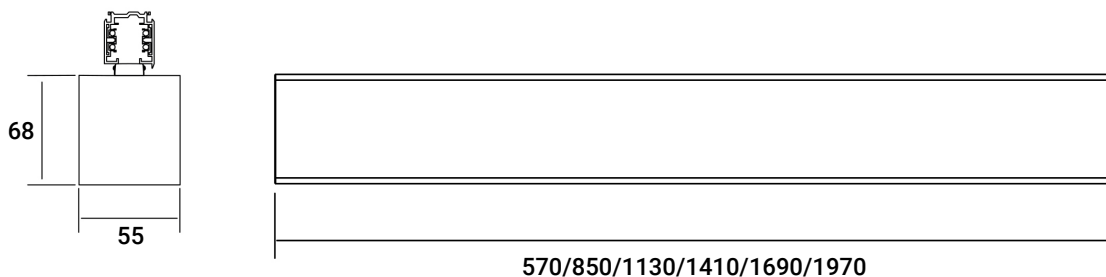

ESTANDAR/STANDARD

5 AÑOS / 5 YEARS
 220-240V / 50-60Hz
 IP 40
 IK 02
 CLASE I / CLASS I
 50.000h / L80B10
 -20° / +35°
 CRI 80

DISPONIBLE/AVAILABLE

1-10V DALI
 2700K / 3000K / 5000K / 6000K
 EMERGENCY 1h / 3h

CONFIGURACION ONLINE / ONLINE CONFIGURATION



Código / Code	Referencia / Reference	Kg	Potencia / Power	Lúmenes / Lumens	Eficiencia / Efficiency	CCT (K)
---------------	------------------------	----	------------------	------------------	-------------------------	---------

INTEGRACION EN CARRIL TRIFASICO DE 3 POLOS - INTEGRATION INTO 3 PINES THREE PHASE TRACK

N55211K8BI	NT55/OPAL-570-16W 2540lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	1,7	16W	2540	159 lm/W	4000
N55213K6BI	NT55/OPAL-570-24W 3600lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	1,7	24W	3600	150 lm/W	4000
N55313K6BI	NT55/OPAL-1130-32W 5080lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	2,6	32W	5080	159 lm/W	4000
N55317K2BI	NT55/OPAL-1130-48W 7200lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	2,6	48W	7200	150 lm/W	4000
N55414K5BI	NT55/OPAL-1410-40W 6350lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,1	40W	6350	159 lm/W	4000
N55419K0BI	NT55/OPAL-1410-60W 9000lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,1	60W	9000	150 lm/W	4000
N55517K6BI	NT55/OPAL-1690-48W 7600lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,7	48W	7600	159 lm/W	4000
N555110KBI	NT55/OPAL-1690-72W 10800lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,7	72W	10800	150 lm/W	4000
N55618K8BI	NT55/OPAL-1970-56W 8850lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	4,2	56W	8850	159 lm/W	4000
N556112KBI	NT55/OPAL-1970-84W 12600lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	4,2	84W	12600	150 lm/W	4000

INTEGRACION EN CARRIL TRIFASICO DE 5 POLOS - INTEGRATION INTO 5 PINES THREE PHASE TRACK

N55211K8BJ	NT55/OPAL-570-16W 2540lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	1,7	16W	2540	159 lm/W	4000
N55213K6BJ	NT55/OPAL-570-24W 3600lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	1,7	24W	3600	150 lm/W	4000
N55313K6BJ	NT55/OPAL-1130-32W 5080lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	2,6	32W	5080	159 lm/W	4000
N55317K2BJ	NT55/OPAL-1130-48W 7200lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	2,6	48W	7200	150 lm/W	4000
N55414K5BJ	NT55/OPAL-1410-40W 6350lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,1	40W	6350	159 lm/W	4000
N55419K0BJ	NT55/OPAL-1410-60W 9000lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,1	60W	9000	150 lm/W	4000
N55517K6BJ	NT55/OPAL-1690-48W 7600lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,7	48W	7600	159 lm/W	4000
N555110KBJ	NT55/OPAL-1690-72W 10800lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	3,7	72W	10800	150 lm/W	4000
N55618K8BJ	NT55/OPAL-1970-56W 8850lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	4,2	56W	8850	159 lm/W	4000
N556112KBJ	NT55/OPAL-1970-84W 12600lm/840+ADAPTADOR CARRIL/RAIL ADAPTER	4,2	84W	12600	150 lm/W	4000













ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING 1-10V | DALI KIT DE EMERGENCIA/EMERGENCY KIT 1h | 3h T.COLOR 2700K, 3000K, 5000K, 6000K
 REGULADOR DE LUZ + DETECTOR DE PRESENCIA (RLP)/LIGHT SENSOR + PRESENCE DETECTOR (RLP)

BAJO CONSULTA/UNDER REQUEST TUNABLE WHITE

ACCESORIOS | ACCESSORIES

DE CARRIL TRIFÁSICO DE 3 O 5 POLOS/THREE-PHASE TRACK 3 OR 5 PINES

CARRIL EMPOTRADO RECESSED TRACK	CODIGO/CODE 3 POLOS/ 3 PINES	CODIGO/CODE 5 POLOS/ 5 PINES	CARRIL ADOSADO SURFACE TRACK	CODIGO/CODE 3 POLOS/ 3 PINES	CODIGO/CODE 5 POLOS/ 5 PINES
	<u>ZIPCE23PB</u> Carril empotrado Recessed electrified track 2 m	<u>ZIPCE25PB</u> Carril empotrado Recessed electrified track 2 m		<u>ZIPCS23PB</u> Carril adosado Surface electrified track 2 m	<u>ZIPCS25PB</u> Carril empotrado Surface electrified track 2 m
	<u>ZIPCE33PB</u> Carril empotrado Recessed electrified track 3 m	<u>ZIPCE35PB</u> Carril empotrado Recessed electrified track 3 m		<u>ZIPCS33PB</u> Carril adosado Surface electrified track 3 m	<u>ZIPCS35PB</u> Carril empotrado Surface electrified track 3 m
	DERECHO/ RIGHT <u>ZIPAD3PB</u> IZQUIERDO/LEFT <u>ZIPAI3PB</u> Alimentador final derecho/izquierdo Final connection right/left	DERECHO/ RIGHT <u>ZIPAD5PB</u> IZQUIERDO/LEFT <u>ZIPAI5PB</u> Alimentador final derecho/izquierdo Final connection right/left		<u>ZIPUC3PB</u> Unión interna carril Track internal joint	<u>ZIPUC5PB</u> Unión interna carril Track internal joint
	<u>ZIPUL3PB</u> Unión en "L" carril "L" track joint	<u>ZIPUL5PB</u> Unión en "L" carril "L" track joint		<u>ZIPUT3PB</u> Unión en "T" carril "T" track joint	<u>ZIPUT5PB</u> Unión en "T" carril "T" track joint
	<u>ZIPUX3PB</u> Unión en "X" carril "X" track joint	<u>ZIPUX5PB</u> Unión en "X" carril "X" track joint		<u>ZIPUF3PB</u> Pieza unión codo flexible carril Flexible track joint	<u>ZIPUF5PB</u> Pieza unión codo flexible carril Flexible track joint
	<u>ZIPSUSB</u> Set de suspensión Suspension set			<u>ZIPTFB</u> Tapa final Last cover	

