

## WOOD-R

### ES

Montaje: Suspendido.

Fuente de luz: Módulos lineales LED SMD TRIDONIC.  
Temperatura de color 4000K. Disponible, 3000K.

Sistema óptico: Reflector de aluminio mate.

Óptica estándar LEDIL 65°. Disponible, 30°

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico (no integrado).  
PF>0,95. Disponible, regulable DALI.

Materiales: Aluminio de extrusión de alta calidad lacado al horno,  
forrado con madera tratada en diferentes acabados.

Acabado: Haya. Disponible, roble y sapeli.



### EN

Mounting: Suspended.

Light source: TRIDONIC SMD LED linear modules.  
Temperature color 4000K. Available, 3000K.

Optical system: Mate aluminum reflector.

LEDIL standard lens 65°. Available, 30°.

Light distribution: Direct.


Electrical equipment: Electronic control gear (not integrated). PF>0,95.  
Available, dimmable DALI.

Materials: Body: High-quality extruded aluminum, baked lacquered, lined  
with treated wood in different finishes.



Surface finish: Beech color. Available, Oak and sapele.



ESTANDAR | STANDARD  
WOOD-R-65°-31W




WOOD-R-30°-31W

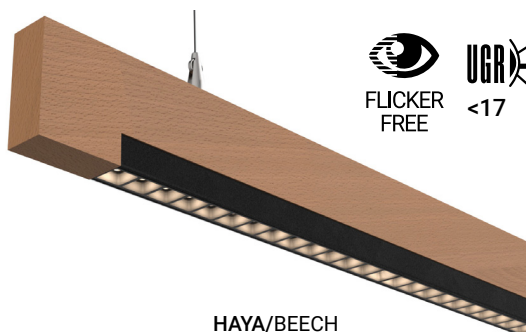


HAYA/BEECH

OPTICA/LENS

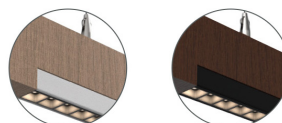



BLANCA/WHITE NEGRA/BLACK




ROBLE/OAK




SAPELI/SAPELE

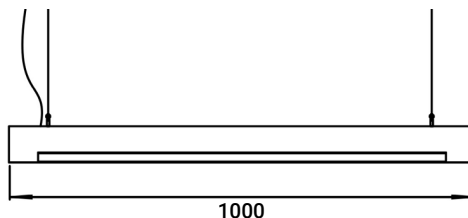

ESTANDAR/STANDARD



DISPONIBLE/AVAILABLE



CONFIGURACION ONLINE  
ONLINE CONFIGURATION



Código Code	Referencia Reference	Kg Kg	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
WR13B2K0H	WOOD-RB-65°-1000-15W 2000lm/840+SUS	1,8	15W	2000	133 lm/W	4000
WR13B3K9H	WOOD-RB-65°-1000-31W 3900lm/840+SUS	1,8	31W	3900	126 lm/W	4000
WR13N2K0H	WOOD-RN-65°-1000-15W 2000lm/840+SUS	1,8	15W	2000	133 lm/W	4000
WR13N3K9H	WOOD-RN-65°-1000-31W 3900lm/840+SUS	1,8	31W	3900	126 lm/W	4000

#### ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

REGULACION/DIMING DALI T.COLOR 3000K OPTICA/LENS 30°

FLORON PORTAEQUIPOS DE MADERA/WOODEN EQUIPMENT HOLDER FLORON PORTAEQUIPOS METALICO/METAL EQUIPMENT HOLDER